

## Model: SMF-R3

### WIFI & 433MHz Dual Module Receiver





- Compatible to connect amazon echo, google home, tmallgenie etc smart devices, turn on/off your appliances through voice-control
- Synchronous on/off with app
- Remote control the devices .Control home appliances when in the office
- Set timers to turn on/off appliances, like what time to turn on/off
- Available to share devices to family members, multi-phonescan control devices through app simultaneously



### WIFI Receiver Parameters

- Product Dimensions: 75x28x28.5mm
- Frequency: 802.11b/n/g&433mhz
- Material: Fireproof PC
- Sensitivity: -116dbm
- Lightning-proof: Yes
- Zero-crossing Trigger: Yes
- Working Power:  $\leq 0.9w$
- Working Voltage: AC 80-275V
- Output Power: Resistive Load:1800W  
Mixed Load:1000w(LED)
- Working Temperature Rise: 20°C
- Life Of Relay: >400(Thousand Times)
- Warranty: 5 Years


### WIFI Receiver Smart Switch

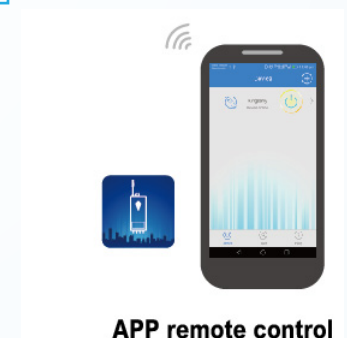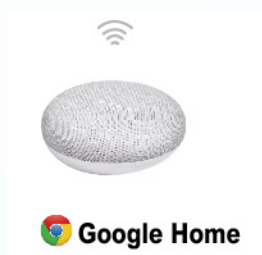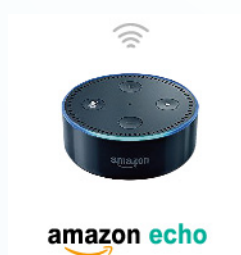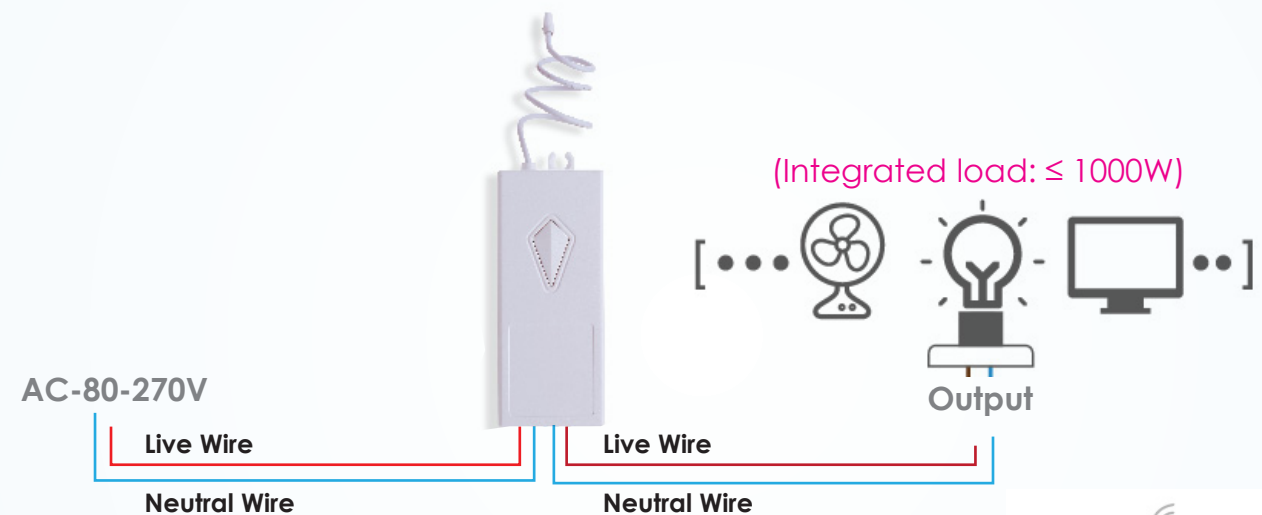

Notes:keep Wifi Receiver Connected WIFI At Home

## Model: SMF-R3

### Smart Switch Program Diagram

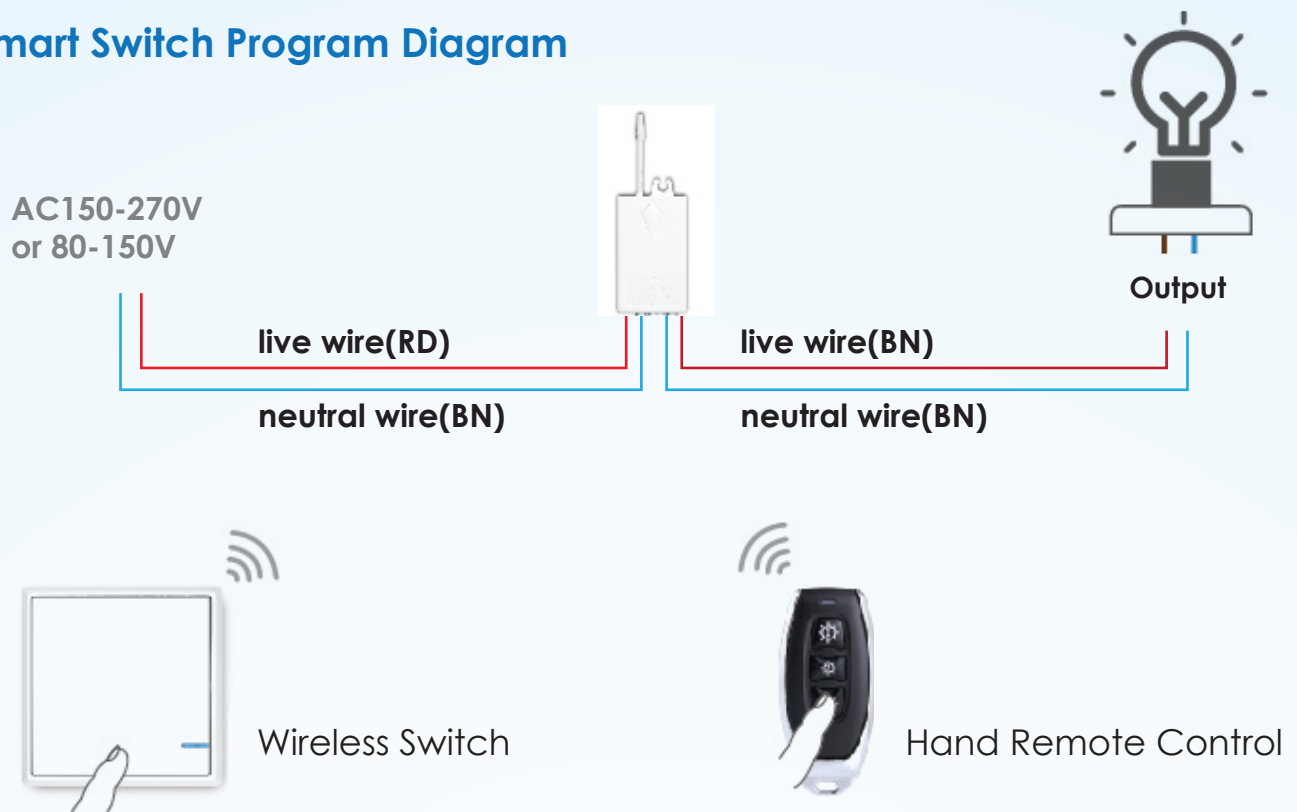

**Model: SMF-R3 -110V**  
**433MHz Receiver**



**Model: SMF-R3 -220V**  
**433MHz Receiver**

### 433MHz Receiver Parameters

- Product Dimensions: 39x23x22mm
- Material: Fireproof Pc
- Sensitivity: -116dbm
- Lighting-proof: Yes
- Zero-crossing Trigger: yes
- Working Voltage: AC 150-275(EU Version)  
Or Ac80-150v(Us Version)
- Warranty: 5 Years
- Output Power:  
Resistive Load:180cw  
Mixed Load: 1000w(Led)
- Working Temperature  
Rise: 15°C
- Life Of Relay:  
>400(Thousand Times)