

Network Video Recorder

NVR302 Series



Key Features

- Support H.265/H.264 video formats
- Support AHD, TVI, CVI, CVBS, IP cameras with adaptive access
- 8/16-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable

Specifications


Model	NVR302-08Q	NVR302-08U	NVR302-16Q
Video/Audio Input			
Analog Video Input	8-ch, BNC	8-ch, BNC	16-ch, BNC
IP Video Input	4-ch	8-ch	8-ch
Supported Analog Camera Types	Support AHD input: 3M@30/25fps/18fps(channel1 - channel2), 1080P@30/25fps, 720P@30/25/50/60fps Support TVI input: 3M@20/18fps (channel1 - channel2), 1080P@30/25fps, 720P@30P/25/50/60fps Support CVI input: 1080P@30/25fps, 720P@30/25fps	Support AHD input: 5M@20/12fps 4M@30/25/15fps, 3M@30/25/18fps, 1080P@30/25fps, 720P@30/25/50/60fps Support TVI input: 8M@15/12fps, 6M@10fps, 5M@20/12fps, 4M@30/25/15/12fps, 3M@20/18fps, 1080P@30/25fps,	Support AHD input: 3M@30/25/18fps (channel1 - channel4), 1080P@30/25fps, 720P@30/25/50/60fps Support TVI input: 3M@20/18fps (channel1 - channel4), 1080P@30/25fps, 720P@30/25/50/60fps Support CVI input: 1080P@30/25fps, 720P@30/25fps Support CVBS input

	Support CVBS input	720P@30/25/50/60fps Support CVI input: 8M@15fps, 4M@30/25fps, 1080P@30/25fps, 720P@30/25fps Support CVBS input	
Audio Input	1-ch, RCA	4-ch, RCA	1-ch, RCA
Two-way Audio	1-ch, RCA	-	1-ch, RCA
Channel Associated Audio	-	4-ch, RCA	-
Network			
Incoming Bandwidth	40Mbps	64Mbps	40Mbps
Outgoing Bandwidth	64Mbps	64 Mbps	80Mbps
Remote Users	128		
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE		
Video/Audio Output			
CVBS Output	1-ch, BNC	1-ch, BNC	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz		
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	4K(3840X2160)/60Hz , 4K(3840X2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	3MP/1080p/960P/720p/960H/4CIF/CIF	8MP/5MP/4MP/3MP/1080p/960P/720p/960H/4CIF/CIF	3MP/1080p/960P/720p/960H/4CIF/CIF
Audio Output	1-ch, RCA		
Synchronous Playback	8-ch	8-ch	16-ch
Decoding			
Decoding format	H.265/H.264		
Live View/ Playback	8MP/5MP/4MP/3MP/1080p/960P/720p/960H/4CIF/CIF/QCIF	12MP/8MP/5MP/4MP/3MP/1080p/960P/720p/960H/4CIF/CIF/QCIF	12MP/8MP/5MP/4MP/3MP/1080p/960P/720p/960H/4CIF/CIF/QCIF
Encoding			
Frame Rate	Main stream: 3MP@15P(channel1 - channel2), 2MP@15P(channel3 - channel8), 720P@30P(All channels) Sub stream: D1@30P(Max)	Main stream: 8MP@8P*8 5M@12P*8, 4M@15P*8, 3M@18P*8, 2M@30P*8, 720P@30P*8	Main stream: 3MP@15P(channel1 - channel4), 2MP@15P(channel5 - channel16), 720P@30P(All channels) Sub stream: D1@30P(Max)

		Sub stream: D1@30P(Max)	
Hard Disk			
SATA	2 SATA interface		
Capacity	Up to 8TB for each HDD		
External Interface			
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interfaces	1RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces	
USB Interface	Rear panel: 1 x USB2.0,Front panel: 1xUSB2.0	Rear panel: 1 x USB3.0,Front panel: 1xUSB2.0	
Seral Interface	1 x RS485		
Alarm In	-	8	-
Alarm Out	-	4	-
General			
Power Supply	12V DC Power Consumption: ≤ 12 W(without HDD)	12V DC Power Consumption: ≤ 12 W(without HDD)	12V DC Power Consumption: ≤ 12 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)		
Dimensions(W×D×H)	440mm ×338mm× 44mm (17.3" × 13.3"×1.7")		
Weight (without HDD)	≤1.9 Kg (4.19lb)		

Dimensions

Take NVR302-08U for example

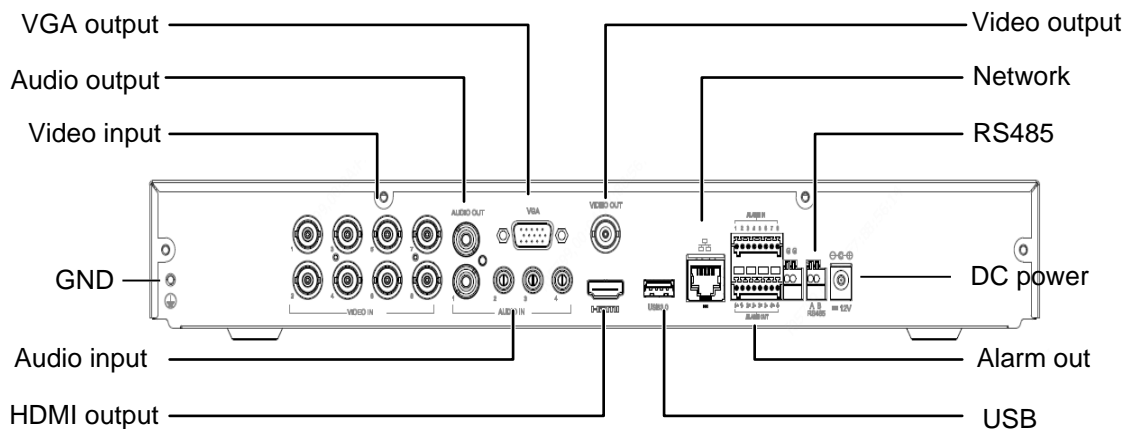

Rear Panel

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.